



DATASHEET | MAY 2022

Transforming Navigation



Applications

- Platform Stabilization Applications
- Camera Systems in Aircraft
- Unmanned Aerial Vehicles (UAV)
- Gun Stabilization Systems
- Aeronautics and Aviation

Key Performance Features

- Industry's Best CSWaP with 1/2 the Weight and 1/3 the Power Requirements of Current Generation FOGs
- Most Affordable Closed-Loop FOG Available
- Next-Generation, Fully-Integrated Optics and Field Programmable Gate Array (FPGA) Electronics
- Closed-Loop Design for Improved Drift Stability, Higher Linearity, and Greater Flexibility

U.S. Patent No. 7,746,476; 8,773,665; 8,798,405; 8,823,946

Suitable for Demanding Applications

The EMCORE-Hawkeye™ Series EG-120 FOG module is an ultra-compact, state-of-the-art design that is the smallest, most affordable closed-loop FOG available on the market today. At approximately 1/2 the weight with 1/3 the power requirements of current generation FOGs, the EG-120 delivers the industry's best Size, Weight and Power (SWaP) compared to competing products and is 35% smaller than EMCORE's previous generation FOGs. The EMCORE-Hawkeye™ EG-120 incorporates advanced, next-generation Field Programmable Gate Array (FPGA) electronics that deliver increased performance and reliability combined with low cost.

The EMCORE-Hawkeye™ series features performance specifications that are ideal for medium accuracy platform stabilization applications such as camera systems used in aircraft, Unmanned Aerial Vehicles (UAVs) and gun stabilization systems. A wide variety of other guidance, navigation and aeronautics applications are supported. The EMCORE-Hawkeye™ FOG platform allows greater selection of performance capabilities to meet a broad range of customer requirements including a low-power (LP) version.

Performance Highlights

Parameter	EG-120	EG-120LP (Low-Power)
Fiber Optic Gyro Type	Closed-Loop	
Input Rate (maximum)	±500°/sec	±250°/sec;
Bias In-Run Stability (25 °C)	Digital: ≤1.0 deg/hr, 1σ (max)	Analog: ≤4.0 deg/hr, 1σ
Bias vs. Temp (≤ 1 °C/min); no compensation	Digital: ≤20°/hr, 1σ	Analog: ≤400°/hr, 1σ
ARW (Angle Random Walk) (25 °C)	Digital: ≤0.04°/√hr	Analog: ≤0.2°/√hr
Bandwidth (45 Degrees, Minimum)	Digital: 250 Hz	Analog: 175 Hz



EG-120


EMCORE-Hawkeye™ Series Fiber Optic Gyroscopes (FOG)

Transforming Navigation

Performance Specifications

Parameter	EG-120	EG-120LP (Low-Power)
Gyro Performance		
Fiber Optic Gyro Type	Closed-Loop	
Input Rate (maximum)	±500°/sec	±250°/sec;
Bias In-Run Stability (25 °C)	Digital: ≤1.0 deg/hr, 1σ (max)	Analog: ≤4.0 deg/hr, 1σ
Bias vs. Temp (≤ 1 °C/min); no compensation	Digital: ≤20°/hr, 1σ	Analog: ≤400°/hr, 1σ
Scale Factor Non-Linearity (max rate, 25 °C)	≤250 ppm, 1σ	≤800 ppm, 1σ
Scale Factor Change Over Temperature	500 ppm, 1σ	≤10,000 ppm, 1σ
ARW (Angle Random Walk) (25 °C)	Digital: ≤0.04°/√hr	Analog: ≤0.2°/√hr
Bandwidth (45 Degrees, Minimum)	Digital: 250 Hz	Analog: 175 Hz
Electrical/Mechanical		
Initialization Time (valid data)	≤0.5 secs	
Data Interface	Asynchronous Digital Output	N/A
Baud Rate	Up to 1 Mbps	N/A
Data Rate	30K samples/sec data rate (16 bit data)	N/A
Dimensions	2.36" Diameter x 0.83" High (60 mm Diameter x 21 mm High)	
Weight, Max	1 Axis: Non-Mag. shielded: 0.08 kg (0.17 lbs)	
Power Consumption, Max (typical)	1 Axis: 1.8W at room temp., 5W over temp.	1 Axis: 2.0W (max w/o TEC) <1.1W (typical)
Input Voltage	+5 VDC	+5, +15, -15 VDC
Environmental		
Temperature: Operating	-40 °C to +75 °C (-40 °F to +167 °F)	-40 °C to +85 °C (-40 °F to +185 °F)
Shock: Non-Operating	800 g, 1 msec	
Vibration: Operating	25 g rms, 20-2000 Hz	25 g rms, 20-2000 Hz
Performance Physical		
Number of Axes	1 Axis	
Housing	Anodized Aluminum	
MTBF	100,000 hr	

Dimensions/Scale

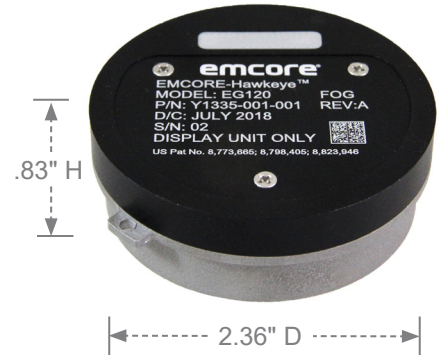

For More Information

+1 866.234.4976 | navigation-sales@emcore.com | emcore.com/nav

EMCORE Corporation


2015 Chestnut Street
 Alhambra, CA 91803 USA

P +1 626.293.3700

F +1 626.293.3429

emcore®

ISO9001
 CERTIFIED



© 2022 EMCORE Corporation. All rights reserved.

Information contained herein is deemed to be reliable and accurate as of issue date. EMCORE reserves the right to change the design or specifications of our products at any time without notice. EMCORE and Systron Donner Inertial are registered trademarks of EMCORE Corporation in the U.S. and other countries.

MADE IN
 USA

Released 05.05.2022